

TECHNICAL INFORMATION

| PRINTING SPECIFICATION | | CL4NX | | | CL6NX | |
|------------------------|-------------------|--|--------------------|--------------------|-------------------|--------------------|
| Printing Method | | Direct Thermal / Thermal Transfer | | | | |
| Print Mode | | Continuous, Tear-off, Cutter, Dispenser, Linerless | | | | |
| Print Resolution | | 8 dots/mm 203 dpi | 12 dots/mm 305 dpi | 24 dots/mm 609 dpi | 8 dots/mm 203 dpi | 12 dots/mm 305 dpi |
| Max. Print Speed | | 10 ips 254 mm/sec | 8 ips 203 mm/sec | 6ips 152 mm/sec | 10 ips 254 mm/sec | 8 ips 203 mm/sec |
| Max. Print Area | Width, mm (inch) | 104mm (4.1") | | | 167.5mm (6.5") | |
| | Length, mm (inch) | 2500mm (98.43") | 1500mm (59.1") | 400mm (15.7") | 2500mm (98.43") | 1500mm (59.1") |
| Processor | | Dual CPU & Dual OS: CPU 1: 2GB ROM, 256MB RAM for Linux OS, CPU 2: 4MB ROM, 64 MB RAM for ITRON OS | | | | |
| Printer Memory | | 2GB ROM, 256MB RAM | | | | |

| CONSUMABLES SPECIFICATION (Recommended to use printer supplies manufactured or certified by SATO) | | | | | | | |
|---|-------------------|---|--|-----------------------|---------------------------------|-----------------------|-----------------------|
| Sensor Type | | I-Mark Sensor (Reflective), Label Gap Sensor (Transmissive) | | | | | |
| Media Type | | Roll or fan-fold die cut labels, Plain paper face stock, Synthetics and Continuous stock | | | | | |
| Media Thickness | | 0.06-0.26mm (0.002" - 0.01") | | | 0.08 - 0.268mm (0.003" - 0.01") | | |
| Label Shape | Diameter | Maximum 220mm (8.6") on 76mm (3") internal core diameter Core diameter: Ø 76mm (3.0"), Ø 101mm (4.0") | | | | | |
| | Wind Direction | Face In / Face Out. No Setting Change Required | | | | | |
| Label Size (Without Liner) | Continuous | Width | 22-128mm .87"-5.0" | 22-128mm 0.87"-5.0" | 22-128mm 0.87"-5.0" | 47-177mm 1.27"-6.96" | 47-177mm 1.27"-6.96" |
| | | Length | 6-2497mm 0.24"-98.3" | 6-1497mm 0.24"-58.9" | 6-397mm 0.24"-15.6" | 16-2500mm 0.63"-98.4" | 16-1500mm 0.63"-59.1" |
| | Tear-Off / Cutter | Width | 22-128mm 0.87"-5.0" | 22-128mm 0.87"-5.0" | 22-128mm 0.87"-5.0" | 47-177mm 1.27"-6.96" | 47-177mm 1.27"-6.96" |
| | | Length | 17-2497mm .67"-98.3" | 17-1497mm .67"-58.9" | 17-397mm .67"-15.6" | 17-2500mm 0.67"-98.4" | 17-1500mm 0.67"-59.1" |
| | Dispenser | Width | 22-128mm .87" to 5.0" | 22-128mm .87" to 5.0" | 22-128mm .87" to 5.0" | 47-177mm 1.27"-6.96" | 47-177mm 1.27"-6.96" |
| | | Length | 27-397mm 1.06"-15.6" | 27-397mm 1.06"-15.6" | 27-397mm 1.06"-15.6" | 27-397mm 1.06"-15.6" | 27-397mm 1.06"-15.6" |
| | Linerless | Width | 60-118mm 2.36"-4.6" | 60-118mm 2.36"-4.6" | 60-118mm 2.36"-4.6" | Not available | Not available |
| | | Length | 30-120mm 1.2"-4.9" | 30-120mm 1.2"-4.9" | 30-120mm 1.2"-4.9" | Not available | Not available |
| | Ribbon | Size | Max. Length: 600m (1969'), 450m (1476') when ribbon width is 39.5mm. Max. Roll Diameter: 90mm (3.5"), Ribbon width : 39.5mm (1.55") to 128mm (5.04") | | | As CL4NX | |
| | | Other | Core diameter: Ø 25.4mm (1"), Wind direction : Face In/ Face Out, No Setting Change Required | | | | |

| FONTS / SYMBOLOGIES | | |
|--|------------------|---|
| Internal Fonts | Standard Bitmap | U, S, M, WB, WL, XS, XU, XM, XB, XL, OCR-A, OCR-B |
| | Scalable Fonts | 15 SATO Fonts |
| | Encoding | Major Latin and Pan-European Code Pages (WGL4), GB18030 (simplified), KSX1001 (Korean), BIG5 (traditional), JIS, SHIFT-JIS, UTF-8 and UTF-16BE also supported |
| Barcode | Linear | Code 39, Code 93, Code 128, CODABAR (NW7), EAN8/13, GS1-DatabarTM, GS1-128(UCC/EAN128), Interleaved 2/5, Industrial 2/5, JAN8/13, Matrix 2/5, MS1, Bookland, PostnetTM, UPC-A/E |
| | 2D Symbolologies | PDF417, Micro PDF, Maxi Code, GS1 Data Matrix, QR Code, Micro QR Code and Composite Symbolologies |
| Print Direction | | Character data rotation: 0°, 90°, 180°, 270° |
| User Downloadable Fonts, Graphics or Formats | | Maximum 100MB |

| INTERFACE CHARACTERISTICS AND INTEGRATION | |
|---|---|
| Standard Interfaces | USB 2.0 (Type A & B), Ethernet (IPv4/v6), RS232C, IEEE1284, EXT, Bluetooth Ver. 3.0*, NFC |
| Optional Interface | Wireless LAN (WiFi and CCX Certified), Wifi Direct, IEEE 802.11a/b/g/n, Dual band (2.4GHz, 5GHz) |
| Remote Maintenance | SNMP Ver. 3, HTTPs |
| Supported printer protocols | Standard: SBPL (SATO Barcode Printer Language) Emulation Language: Auto detect - SZPL, SDPL, SIPL or STCL |

| OPERATING CHARACTERISTICS | | |
|---------------------------|--|--|
| Power Requirements | AC100V~AC240V±10%, 50/60 Hz, Auto-ranging Power Supply, Energy Star – Compliant | |
| Environment | Operating | 0 – 40 °C / 30 –80 % RH (without condensation) |
| | Operating Linerless | 5 –35°C / 30 - 75 % RH (without condensation) |
| | Storage | -20 – 60 °C / 30 –90 % RH (without condensation) |
| Dimensions | CL4NX: 271mm (10.6") x 457mm (17.9") x 321mm (12.6)"CL6NX: 338mm (13.3") x 457mm (17") x 321mm (12.6") | |
| Weight | CL4NX: 15Kg (33 lbs) CL6NX: 20Kg (42 lbs) | |
| Display Panel | TFT Full Color LCD, 3.5"(320 (RGB) *240) | |

| MISCELLANEOUS | |
|-------------------------------------|---|
| Standards & Agency Approvals | IEC 60950, CE Marking, EN 60950-1, EN 55022 Class A, EN 55024, R&TTE, NEMsO-GS, cMETus, UL60950-1/CSA C22.2 No. 60950-1, FCC 15 (SUB B, C), ICES-003, NMB-003, BIS, C-Tick, RCM, CCC, SRRC, KC, S-Mark(Arg), SIRIM, IDA, PTQC, NBTC |
| Functions – Useful features | 18 User Guidance Videos on LCD with space for customized videos, Multi Language support LCD message (30 Languages), Energy Saving, Large Status LED, Multiple Interfaces-Auto-switching, USB Memory for data copy, Status return, Alarm Sound |
| Functions – Self Diagnosis Checking | Thermal head check, Paper end detection, Ribbon end detection, Test print, Head Lift detection |

| OPTIONS | | |
|-------------|-------|---|
| Accessories | CL4NX | Cutter, Linerless Cutter Kit, Dispenser with Internal Backing Paper Rewinder, Real-Time Clock, UHF RFID, Wireless LAN kit |
| | CL6NX | Cutter, Simple Dispenser, Dispenser with Internal Backing Paper Rewinder, Real-Time Clock, Wireless LAN kit. |

| RFID SPECIFICATION (Optional Only for CL4NX) | | |
|--|-----------|--|
| UHF | Standard | ISO/IEC18000-6 Type C Gen2 |
| | Protocols | EPC Gen 2 Class 1, NXP, Impinj, Alien |
| HF | Standard | ISO/IEC 15693, ISO/IEC 14443 Type A, ISO/IEC 18092 |
| | Protocols | ICODE SLI / SLIX/ SLIX-S, Tag-it HF-1, my-d, NTAG203, NTAG210, NTAG213/215/216, MIFARE UltraLight, MIFARE UltraLight C, my-d move NFC, FeliCa Lite-S |
| PJM | Standard | ISO/IEC18000-3 Mode 2 |
| | Protocols | PJM RFID |

*Please contact your local SATO office for availability.



CL4NX

CL6NX

NX Series **Beyond Expectations**

NEXT GENERATION 4" & 6" INDUSTRIAL THERMAL PRINTERS

Flexible & Cost Effective

Simple-to-Operate

All-in-One

Plug-and-Play

www.satoasiapacific.com

The NX Series represents SATO's next generation of thermal printers with advanced support for barcode symbologies, character sets and RFID encoding. A product of SATO's global R&D network, the NX Series incorporates value-added features in a world-class design to deliver a printing solution that goes beyond expectations.


SATO Online Services

Cloud-based IoT solution to keep your operations running & visible



SATO monitors all your printers via cloud (for registered customers)
 By keeping constant watch on printer status, SOS notifies operator when an expendable part needs replacement, and offers prompt and effective resolution to problems, reducing downtime significantly



Cut 86% industrial printer downtime and 83% print & apply machine downtime! * *Based on survey conducted by SATO in Japan

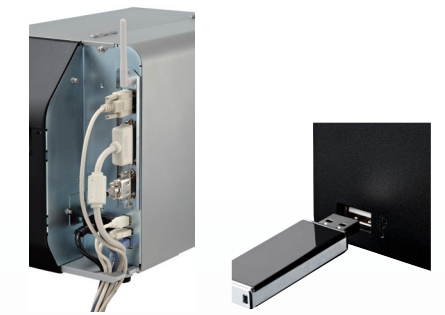

- ### Intuitive Operation
- LED indicator and color display alert operator to printer status. Guidance videos assist in error resolution and printer maintenance.
 - Advanced user interface for full operational control of print, application, I/F, and system settings via front panel display.
 - Customizable GUI content and security enabled menu access let administrators personalize the operator experience.
 - Best in class 60° print head opening, tension damper, and coreless ribbon system facilitate easy media setup.
 - Colored operator touch points ensure safe operation and interactions with movable parts.

- ### Dynamic Integration
- Serial, parallel, LAN and USB combo interface covers all legacy and modern systems requirements. Optional WLAN available.
 - SZPL, SIPL, SDPL, STCL command emulations enable direct replacement of printers in legacy applications.
 - Auto-switching interface setting and media auto-calibration to adjust sensor levels for faster setup time between print jobs.
 - 30+ display languages, 40+ print character sets, and 15 SATO resident fonts, additional user downloadable space provide universal format coverage.
 - All major agency approvals permit global deployment for large enterprises or future expansion potential for growing startups.

- ### Industrial Durability
- Metal casing including front panel and side covers protects against any industrial environment.
 - Die-cast Aluminium frame, print and ribbon mechanism provide solid stability to ensure print quality and printer durability.
 - 1 year global warranty for printer including installed options. Long lasting 30 kilometer guaranteed print head and platen roller.

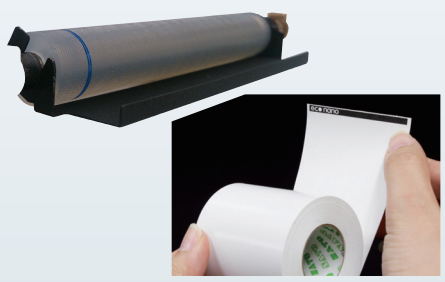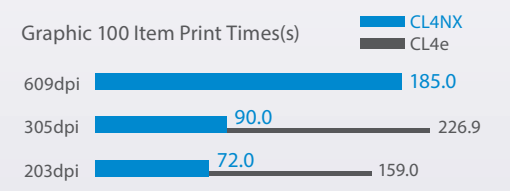


- ### Accurate and Efficient Performance
- Head check function performs print head status analysis before each print to assure printing accuracy.
 - High speed data processing with 10 ips print speed equals faster first label out and print job throughput.
 - 10 preset darkness levels with finite adjustment between presets for optimal print performance setting
 - UHF and HF RFID* options support a wide variety of tags and include adjustable antenna system for optimal inlay encoding

- ### Sustainable Innovation
- Coreless ribbon uptake simplifies the loading process. Thermal ribbon is now directly attached to ribbon spindle and removed via one-touch release button.
 - Superior energy efficiency certified by Energy Star the leader in product accreditation. Decrease energy costs without any sacrifice to functionality
 - Optional linerless kit eliminates waste associated with traditional label production. No liner equals either more labels per roll for increased productivity or smaller rolls sizes for decreased logistic and storage expenses.



- ### Functional Form
- Bi-fold cover allows compact design and reduces workspace requirement.
 - Supports internal, external, clockwise and counter-clockwise rotational media types. Adjustable label holder for increased internal roll capacity.
 - Field installable options, snap in print head, and tool-less platen replacement minimize downtime.
 - External media inlets, mounting fixtures, and cable hook.

- 1. Minimise downtime through proactive preventative maintenance**
- 2. Keep all printers visible to achieve efficiency with dashboard**
- 3. Use SOS to manage all your IT assets on-site**

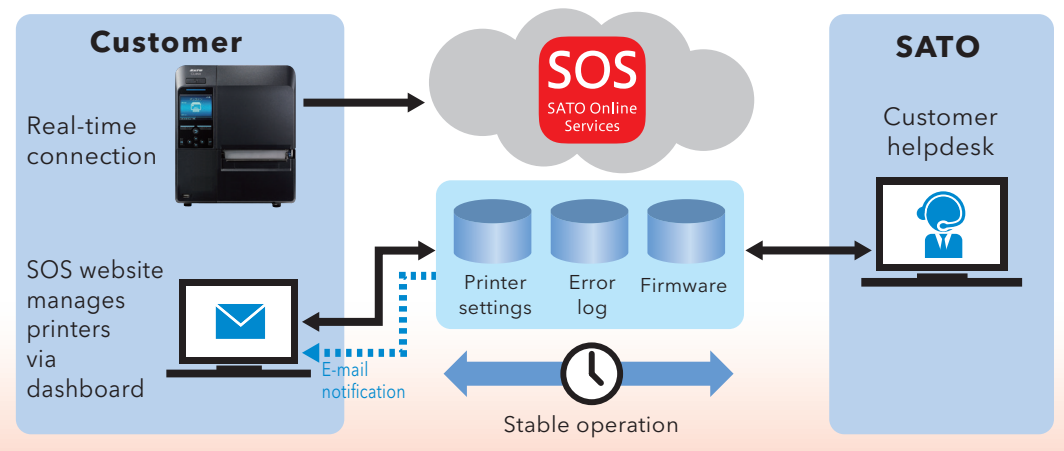

NEW FEATURES



- ### Standalone Printing
- AEP resides within printer, eliminates need for costly PC
 - Takes up less space due to PC-less printing
 - Less downtime expected and parts to be maintained
 - Able to connect with peripheral devices such as a barcode scanner, numeric keypad and full-sized keyboard



- ### Easy Barcode Check
- Compatible with 1D & 2D codes
 - Standard function comes with 'Readable' and 'Comparison' modes
 - Easy installation of stand kit and certified scanner (sold separately)
 - Able to print void mark on defective labels

Model Lineup

Cutter

- Front mount guillotine cutter unit
- Single item or batch print job cut settings
- Long lasting blade life



Standard

- Tear-off bar for manual media separation
- Label holder adjustable to support up to 10" OD media rolls
- External media slots for rear or bottom feed applications



Dispenser

- Dispenser unit including peel bar for liner separation
- Additional internal liner take-up for active peel applications

