


HIOKI


DIGITAL PHASE DETECTOR
PD3259

NEW

Until now, laying a 3-phase power line meant...

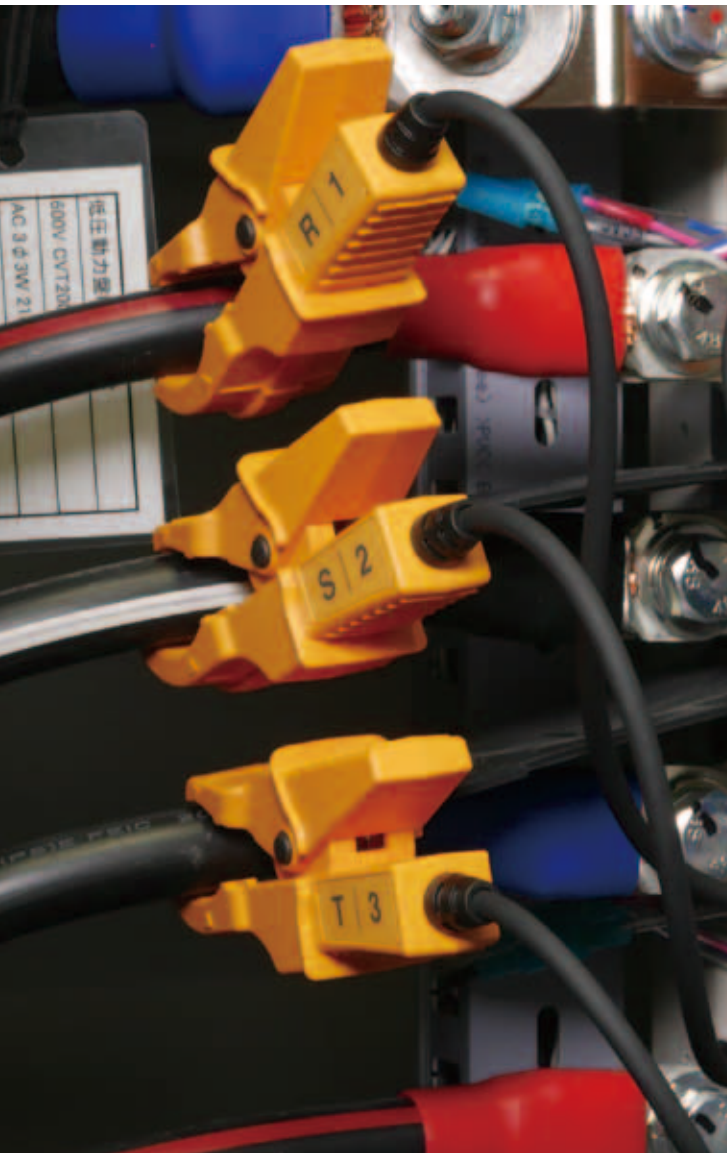

1 phase
detection check

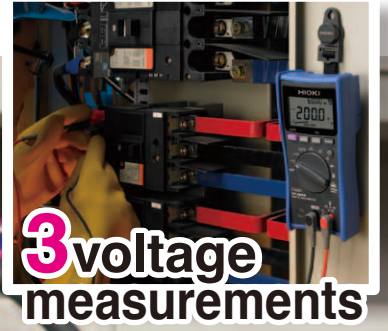

3 voltage
measurements



World First Non-Metallic Contact
Now, with the PD3259 digital phase detector...

Safe


Fast

Just clip the probes onto covered cables, and your 3-phase power line inspection is complete!




All the info you need on one large display

Positive phase sequence display

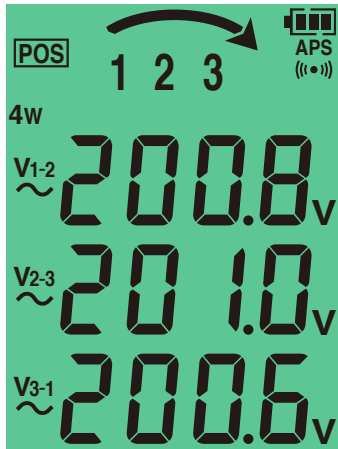

Green backlight with beeping tone

Negative phase sequence display

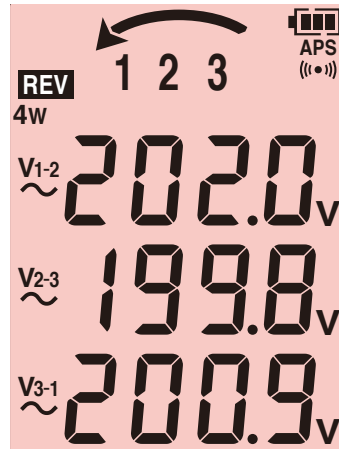

Red backlight with continuous tone



Handy for work certification photos

Display phase sequence, 3-phase voltage
Use as-is in work certification photos

Order Code/Accessories



DIGITAL PHASE DETECTOR PD3259

Accessories

Four AA alkaline batteries (LR6)
Carrying case, Instruction Manual

Order Code: PD3259



Carrying case C0203 (accessory)



MAGNETIC STRAP Z5004

Options

Specifications

(Accuracy guarantee: 1 year, Post-adjustment accuracy guarantee: 1 year) Product guarantee: 3 years

Detection functions	Phase detection, open phase, prediction of ground phase (Three-phase line)	Response time	2 s max.
Measurement parameters	Three-phase AC voltage (line-to-line voltage and voltage to ground) and frequency	Display update rate	750 ms
Voltage measurement accuracy	±2.0% rdg. ±8 dgt.	Hold functionality	HOLD key freezes reading
Frequency measurement accuracy	±0.5% rdg. ±1 dgt.	Drop proof	On concrete: 1 m (3.28 ft)
Measurement targets	Covered cables, metal portions Use on shielded cables not supported Three-phase 90.0 to 520.0 V AC (45 to 66 Hz)	Dust-proofness, water-proofness	IP54 (device body only)
Diameter of measurable conductors	Finished outer diameter: 6 to 30 mm (0.24 to 1.18 in)	Auto power-off	Power shut off when keys not operated for approx. 10 minutes
Maximum rated voltage to earth	600 V AC (CATIII), 300 V AC (CATIV)	Battery low warning	Remaining battery power indicated in 4 levels
Standards	Safety: EN61010, EMC: EN61326 Class A	Power supply	Four AA alkaline batteries (LR6) Continuous operating time: approx. 5 hours
		External dimensions	Device body: 84 mm (3.31 in)W × 146 mm (5.75 in)H × 46 mm (1.81 in)D, Cord length: 0.5 m (1.64 ft)
		Mass	Approx. 590 g (20.8 oz) with batteries fitted

Note: Company names and Product names appearing in this catalog are trademarks or registered trademarks of various companies.

HIOKI

HIOKI E. E. CORPORATION

HEADQUARTERS

81 Koizumi, Ueda, Nagano, 386-1192, Japan
TEL +81-268-28-0562 FAX +81-268-28-0568
<http://www.hioki.com> / E-mail: os-com@hioki.co.jp

HIOKI USA CORPORATION

TEL +1-609-409-9109 FAX +1-609-409-9108
<http://www.hiokiusa.com> / E-mail: hioki@hiokiusa.com

HIOKI (Shanghai) SALES & TRADING CO., LTD.
TEL +86-21-63910090 FAX +86-21-63910360
<http://www.hioki.cn> / E-mail: info@hioki.com.cn

HIOKI INDIA PRIVATE LIMITED
TEL +91-124-6590210
E-mail: hioki@hioki.in

HIOKI SINGAPORE PTE. LTD.
TEL +65-6634-7677 FAX +65-6634-7477
E-mail: info-sg@hioki.com.sg

HIOKI KOREA CO., LTD.
TEL +82-2-2183-8847 FAX +82-2-2183-3360
E-mail: info-kr@hioki.co.jp

DISTRIBUTED BY