

**RF Load 30 Watts Medium Power To 4.2 GHz Precision SMA Female**

**Electrical Specifications\***

Description	Min	Typ	Max	Units
Frequency Range	DC		4.2	GHz
Impedance			50	Ohms
VSWR			1.25:1	
Input Power			30	Watts

\* Values at 25°C, sea level

**Mechanical Specifications**

**Temperature**

Operating Range

+100 to -55 deg C

**Size**

Length

0.5 in [12.7 mm]

Width/Dia.

1 in [25.4 mm]

Height

0.41 in [10.41 mm]

**Connector**

Type

SMA Female

Body Material and Plating

Stainless Steel, Gold

**Compliance Certifications** (visit [www.FairviewMicrowave.com](http://www.FairviewMicrowave.com) for current document)

RoHS Compliant

Yes

REACH Compliant

06/15/2015

**Plotted and Other Data**

Notes:

- Values at 25 °C, sea level
- Heat Sink Required for Proper Operation. Unit is cooled by conduction to heat sink.




**Features:**

- RF Load Design: Precision
- Connector: SMA Female
- Connection Method: Standard
- Body Style: Straight

Fairview Microwave  
 1130 Junction Dr. #100  
 Allen, TX 75013  
 Tel: 1-800-715-4396 / (972) 649-6678  
 Fax: (972) 649-6689  
[www.fairviewmicrowave.com](http://www.fairviewmicrowave.com)  
[sales@fairviewmicrowave.com](mailto:sales@fairviewmicrowave.com)

**Typical Performance Data**


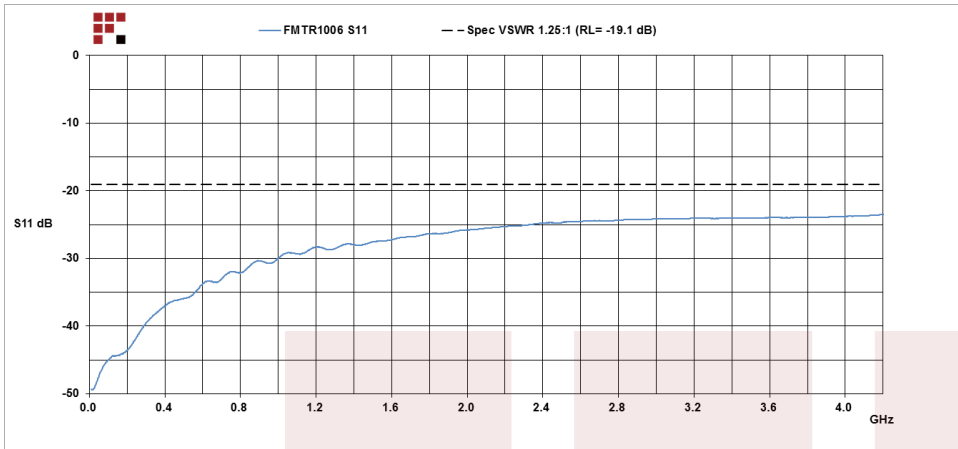


RF Load 30 Watts Medium Power To 4.2 GHz Precision SMA Female from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [RF Load 30 Watts Medium Power To 4.2 GHz Precision SMA Female FMTR1006](#)

URL: <http://www.fairviewmicrowave.com/rf-load-30-watts-4.2-ghz-precision-sma-female-fmtr1006-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

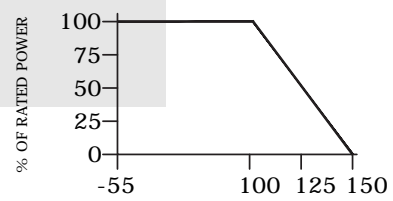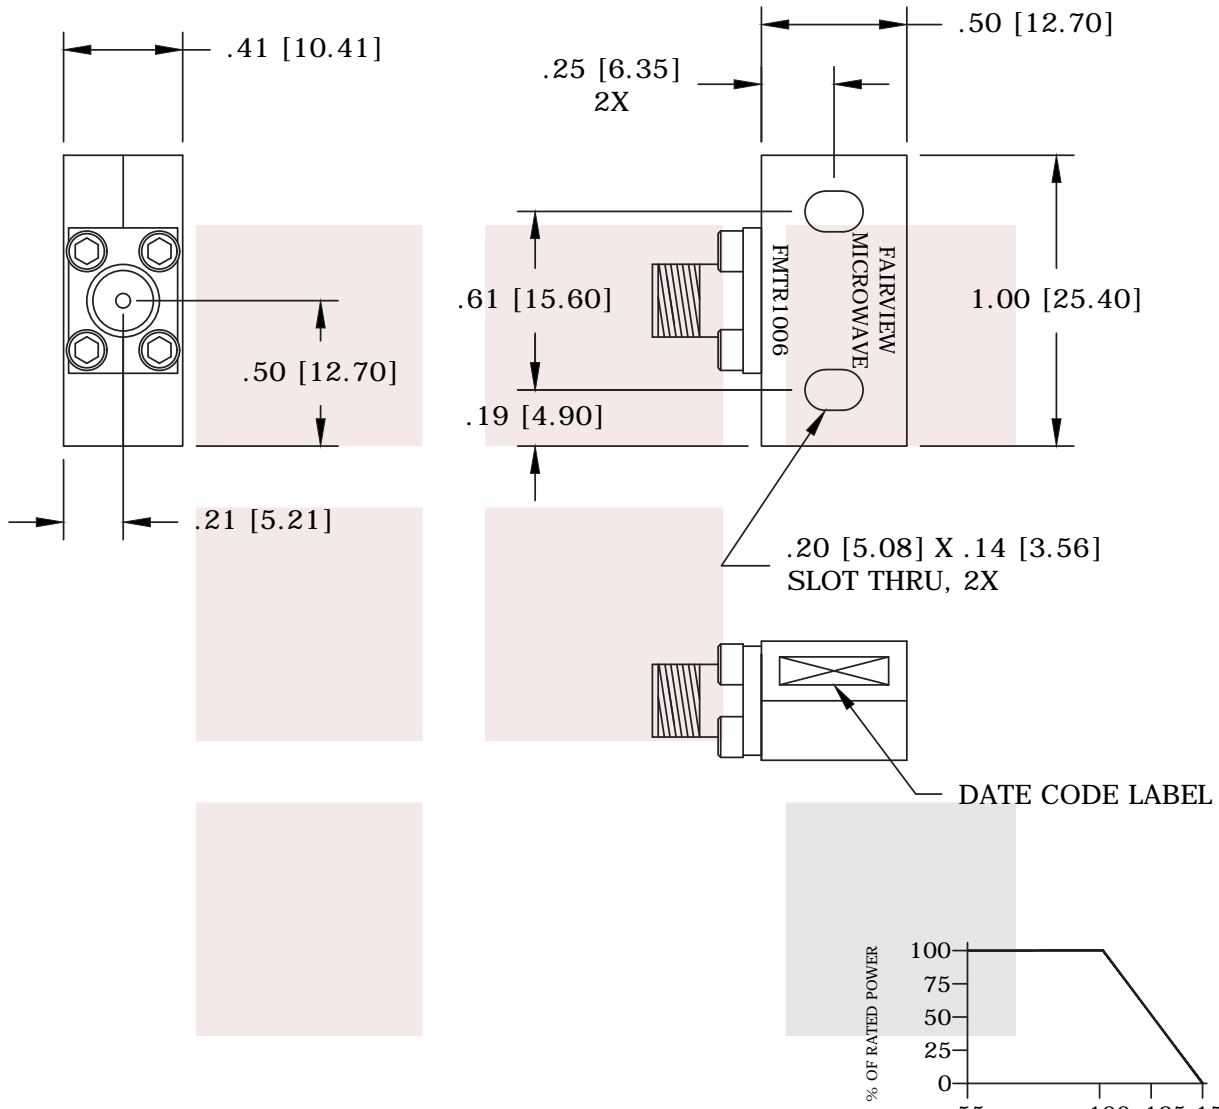

TOLERANCE	.XX ±.02
	.XXX ±.010
	ANG. ±1/2°

\* THESE DIMENSIONS AND TOLERANCES SUPERSSEDE NOTE #1 ON TITLE BLOCK.

\* Heat Sink Required for Proper Operation, Unit is cooled by conduction to heat sink\*

<b>FAIRVIEW MICROWAVE INC.</b>		NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].			
ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM		DWG NO		CAGE CODE	
TITLE RF Load 30 Watts Medium Power To 4.2 GHz Precision SMA Female		FMTR1006		3FKR5	
CAD FILE	040915	SHEET	SCALE	N/A	SIZE A 2233