



# **SSMB Male to BNC Female Adapter**

### **Electrical Specifications**

| Description     | Min | Тур | Max   | Units |  |
|-----------------|-----|-----|-------|-------|--|
| Frequency Range | DC  |     | 4     | GHz   |  |
| VSWR            |     |     | 1.3:1 |       |  |

#### Specifications by Frequency

| F1      | F2      | F3             | F4             | F5             | Units          |
|---------|---------|----------------|----------------|----------------|----------------|
| DC to 1 | 1 to 4  |                |                |                | GHz            |
| 1.25:1  | 1.3:1   |                |                |                |                |
|         | DC to 1 | DC to 1 1 to 4 |

## **Mechanical Specifications**

Size

Length 1.265 in [32.13 mm]
Width 0.385 in [9.78 mm]
Weight 0.02646 lbs [12 g]

| Description       | Connector 1 | Connector 2 |
|-------------------|-------------|-------------|
| Туре              | SSMB Male   | BNC Female  |
| Connection Method | Standard    | Standard    |
| Polarity          | Standard    | Standard    |

## **Material Specifications**

| Description           | Connector 1 | Connector 2 |  |  |
|-----------------------|-------------|-------------|--|--|
| Туре                  | SSMB Male   | BNC Female  |  |  |
| Contact Plating       | Gold        | Gold        |  |  |
| Contact Plating Spec. | MIL-G-45204 | MIL-G-45204 |  |  |
| Body Material         | Brass       | Brass       |  |  |
| Body Plating          | Nickel      | Nickel      |  |  |
|                       |             |             |  |  |

#### **Environmental Specifications**

**Temperature** 

Operating Range -55 to +110 deg C

**Compliance Certifications** (visit www.FairviewMicrowave.com for current document)

RoHS Compliant REACH Compliant

12/17/2015

#### **Plotted and Other Data**

Notes:



# **Configuration:**


- SSMB Male Connector 1
- BNC Female Connector 2
- 50 Ohms
- Straight Body Geometry

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013

Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com



### **Typical Performance Data**

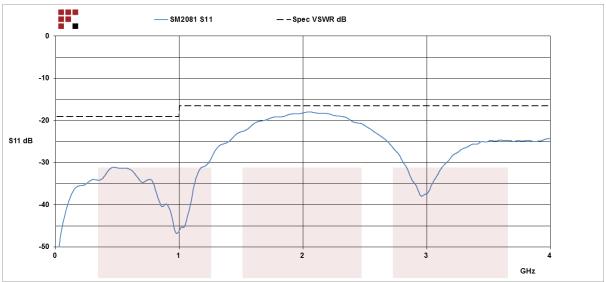

SSMB Male to BNC Female Adapter from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.


For additional information on this product, please click the following link: SSMB Male to BNC Female Adapter SM2081

URL: https://www.fairviewmicrowave.com/mini-smb-plug-bnc-female-adapter-sm2081-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.





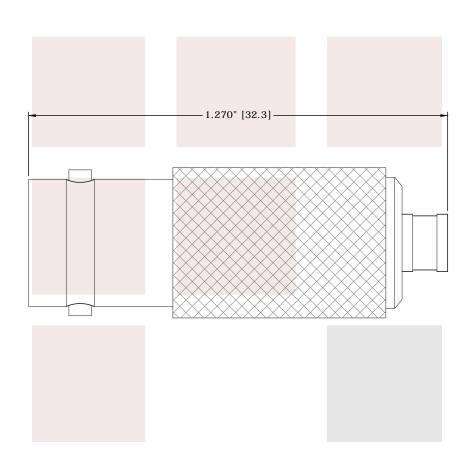

| FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM | NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm]. |       |      |                 |        |      |
|---|--|-------|------|-----------------|--------|------|
| SSMB Male to BNC Female Adapter                                   | DWG NO SM2081  |       |      | CAGE CODE 3FKR5 |        |      |
|   | CAD FILE 072116  | SHEET | SCAL | E N/A           | SIZE A | 5568 |