

SM3135 DATA SHEET

2.92mm Female to N Male Adapter

2.92mm female to type N male adapter part number SM3135 from Fairview Microwave is in-stock and ships same day. This Fairview 2.92mm to type N adapter has a female to male gender configuration. SM3135 2.92mm female to type N male adapter operates to 18 GHz. The 2.92mm connector mates mechanically with commercially available SMA and 3.5mm connectors. The Fairview Microwave RF adapter provides excellent VSWR of 1.2:1 maximum.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications

Description	Min	Тур	Max	Units
Frequency Range	DC		18	GHz
VSWR			1.2:1	

Electrical Specification Notes: Values at 25°C, sea level.

Mechanical Specifications

Size

Length 1.59 in [40.39 mm]
Weight 0.09348 lbs [42.4 g]

Description	Connector 1	Connector 2
Туре	2.92mm Female	N Male
Polarity	Standard	Standard
Mating Cycles	500	500
Mating Torque		12 to 15 in-lbs
		[1.36 to 1.70 Nm]



Configuration:

- 2.92mm Female Connector 1
- N Male Connector 2
- 50 Ohms
- Straight Body Geometry

Features:

- VSWR of 1.2:1 max up to 18 GHz
- Contact plating according to MIL-G-45204
- Gold over Nickel Plated Beryllium Copper Contact

Applications:

- Enables Between Series Connections
- General Purpose Test

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013

Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689

www.fairviewmicrowave.com sales@fairviewmicrowave.com





Material Specifications

Description	Connector 1	Connector 2
Туре	2.92mm Female	N Male
Contact Material	Beryllium Copper	Beryllium Copper
Contact Plating	Gold over Nickel	Gold over Nickel
Contact Plating Spec.	MIL-G-45204	MIL-G-45204
Insulation Material	Oxide-Noryl	Oxide-Noryl
Outer Contact Material	Passivated Stainless St	eel
Outer Contact Plating Spec.	ASTM A380	
Body Material		Passivated Stainless Steel
Body Plating Spec.		ASTM A380
Coupling Nut Material		Passivated Stainless Steel
Coupling Nut Plating Spec.		ASTM A380

Environmental Specifications

Temperature


Operating Range Vibration Salt Spray -55 to +100 deg C MIL-STD 202, Method 204, Condition D (20 G's) MIL-STD 202, Method 101, Condition B, 5% salt solution

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Typical Performance Data

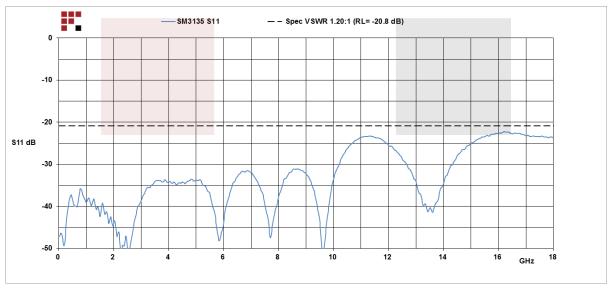





2.92mm Female to N Male Adapter from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order


For additional information on this product, please click the following link: 2.92mm Female to N Male Adapter SM3135

URL: https://www.fairviewmicrowave.com/2.92mm-female-n-male-adapter-sm3135-p.aspx

to implem	ent improv	ements.	Fairview	Microw	ave reserv	es the rigl	nt to mak	ke such	changes	as req	uired. l	Jnless	otherwise
stated, al	l specificati	ons are	nominal.	Fairvie	w Microwa	ve does n	ot make	any re	presentat	ion or	warran	y reg	arding the
suitability	of the part	t describ	ed hereir	for any	y particula	r purpose,	and Fair	view M	icrowave	does	not assı	ıme a	ny liability
arising ou	t of the use	e of any	part or do	ocument	ation.								





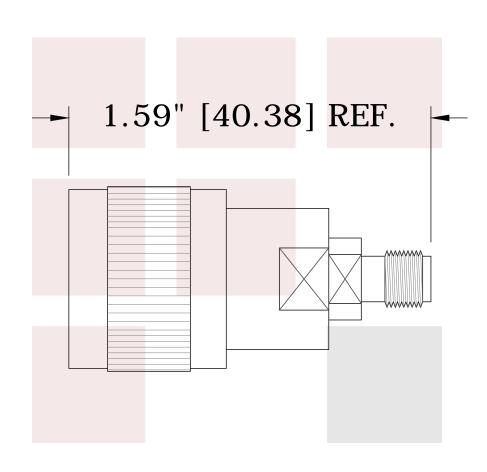

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].						
2.92mm Female to N Male Adapter	DWG NO SM3135				CAGE CODE 3FKR5		
	CAD FILE 020316	SHEET	SCALI	E N/A	SIZE A	5568	