

SM3935 DATA SHEET

1.85mm Male to 1.85mm Female Adapter

1.85mm male to 1.85mm female adapter part number SM3935 from Fairview Microwave is in-stock and ships same day. This Fairview 1.85mm to 1.85mm adapter has a male to female gender configuration. SM3935 1.85mm male to 1.85mm female adapter operates to 65 GHz. The 1.85mm connector mates mechanically with commercially available 2.4mm connectors. The Fairview Microwave RF adapter provides good VSWR of 1.33:1 maximum.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications

65	GHz
1.33:1	

Electrical Specification Notes: Values at 25°C, sea level.

Mechanical Specifications

Size

 Length
 0.806 in [20.47 mm]

 Weight
 0.01014 lbs [4.6 g]

Description	Connector 1	Connector 2	
Туре	1.85mm Male	1.85mm Female	
Polarity	Standard	Standard	
Mating Cycles	500	500 500	
Mating Torque	8 to 10 in-lbs		
	[0.90 to 1.13 Nm]		



Configuration:

- 1.85mm Male Connector 1
- 1.85mm Female Connector 2
- 50 Ohms
- Straight Body Geometry

Features:

- VSWR of 1.33:1 max up to 65 GHz
- Contact plating according to MIL-G-45204
- Gold over Nickel Plated Beryllium Copper Contact

Applications:

- Connector Saver
- General Purpose Test

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013 Tel: 1-800-715-4396 / (972) 649-6678

Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





Material Specifications

Description	Connector 1	Connector 2			
Туре	1.85mm Male	1.85mm Female			
Contact Material	Beryllium Copper	Beryllium Copper			
Contact Plating	Gold over Nickel	Gold over Nickel			
Contact Plating Spec.	MIL-G-45204	MIL-G-45204			
Insulation Material	Oxide-Noryl	Oxide-Noryl			
Outer Contact Material		Passivated Stainless Steel			
Outer Conductor Contact Spe	C.	ASTM A380			
Body Material	Passivated Stainless Steel				
Body Plating Spec.	ASTM A380				
Coupling Nut Material	Passivated Stainless Steel				
Coupling Nut Plating Spec.	ASTM A380				

Environmental Specifications

Temperature


Operating Range Vibration Salt Spray -55 to +100 deg C MIL-STD 202, Method 204, Condition D (20 G's) MIL-STD 202, Method 101, Condition B, 5% salt solution

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Typical Performance Data

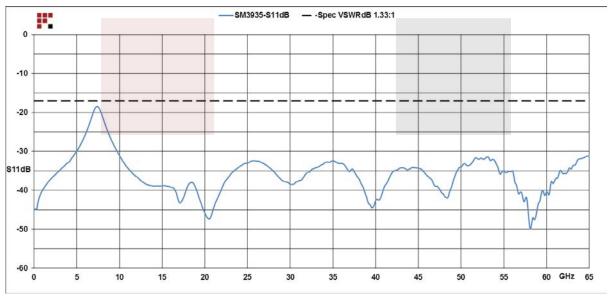





1.85mm Male to 1.85mm Female Adapter from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: 1.85mm Male to 1.85mm Female Adapter SM3935


The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order

URL: https://www.fairviewmicrowave.com/1.85mm-male-1.85mm-female-adapter-sm3935-p.aspx

		w Microwave does	-	-	
		y particular purpos			
t of the use of			,		





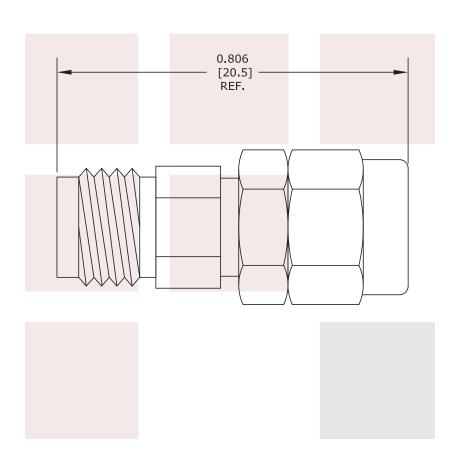

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].					
1.85mm Male to 1.85mm Female Adapter	nm Female Adapter DWG NO SM3935			CAGE C	3FKR5	
	CAD FILE 120815	SHEET	SCALE	E N/A	SIZE A	150