

Dial Indicators

Comparison measuring instruments which ensure high quality, high accuracy and reliability.




An inspection certificate is supplied as standard. Refer to page IX for details.

SERIES 3, 4 — Long Stroke Type, Large Diameter

- Dial indicators with a large-diameter dial face for easy reading.
- Models with longer measuring ranges are also available.
- All types are supplied with limit markers and a bezel clamp as standard.
- Both the stem and the spindle are made of high-strength quench-hardened stainless steel suitable for heavy-duty use.
- The bezel clamp and lifting lever (optional)*1 can be attached to either the right or left side. These parts can be easily installed and removed without tools.

*1: Can be attached only to Code No. **3046S, 3047S, 3050S, 3109S-10** and **4046S**.

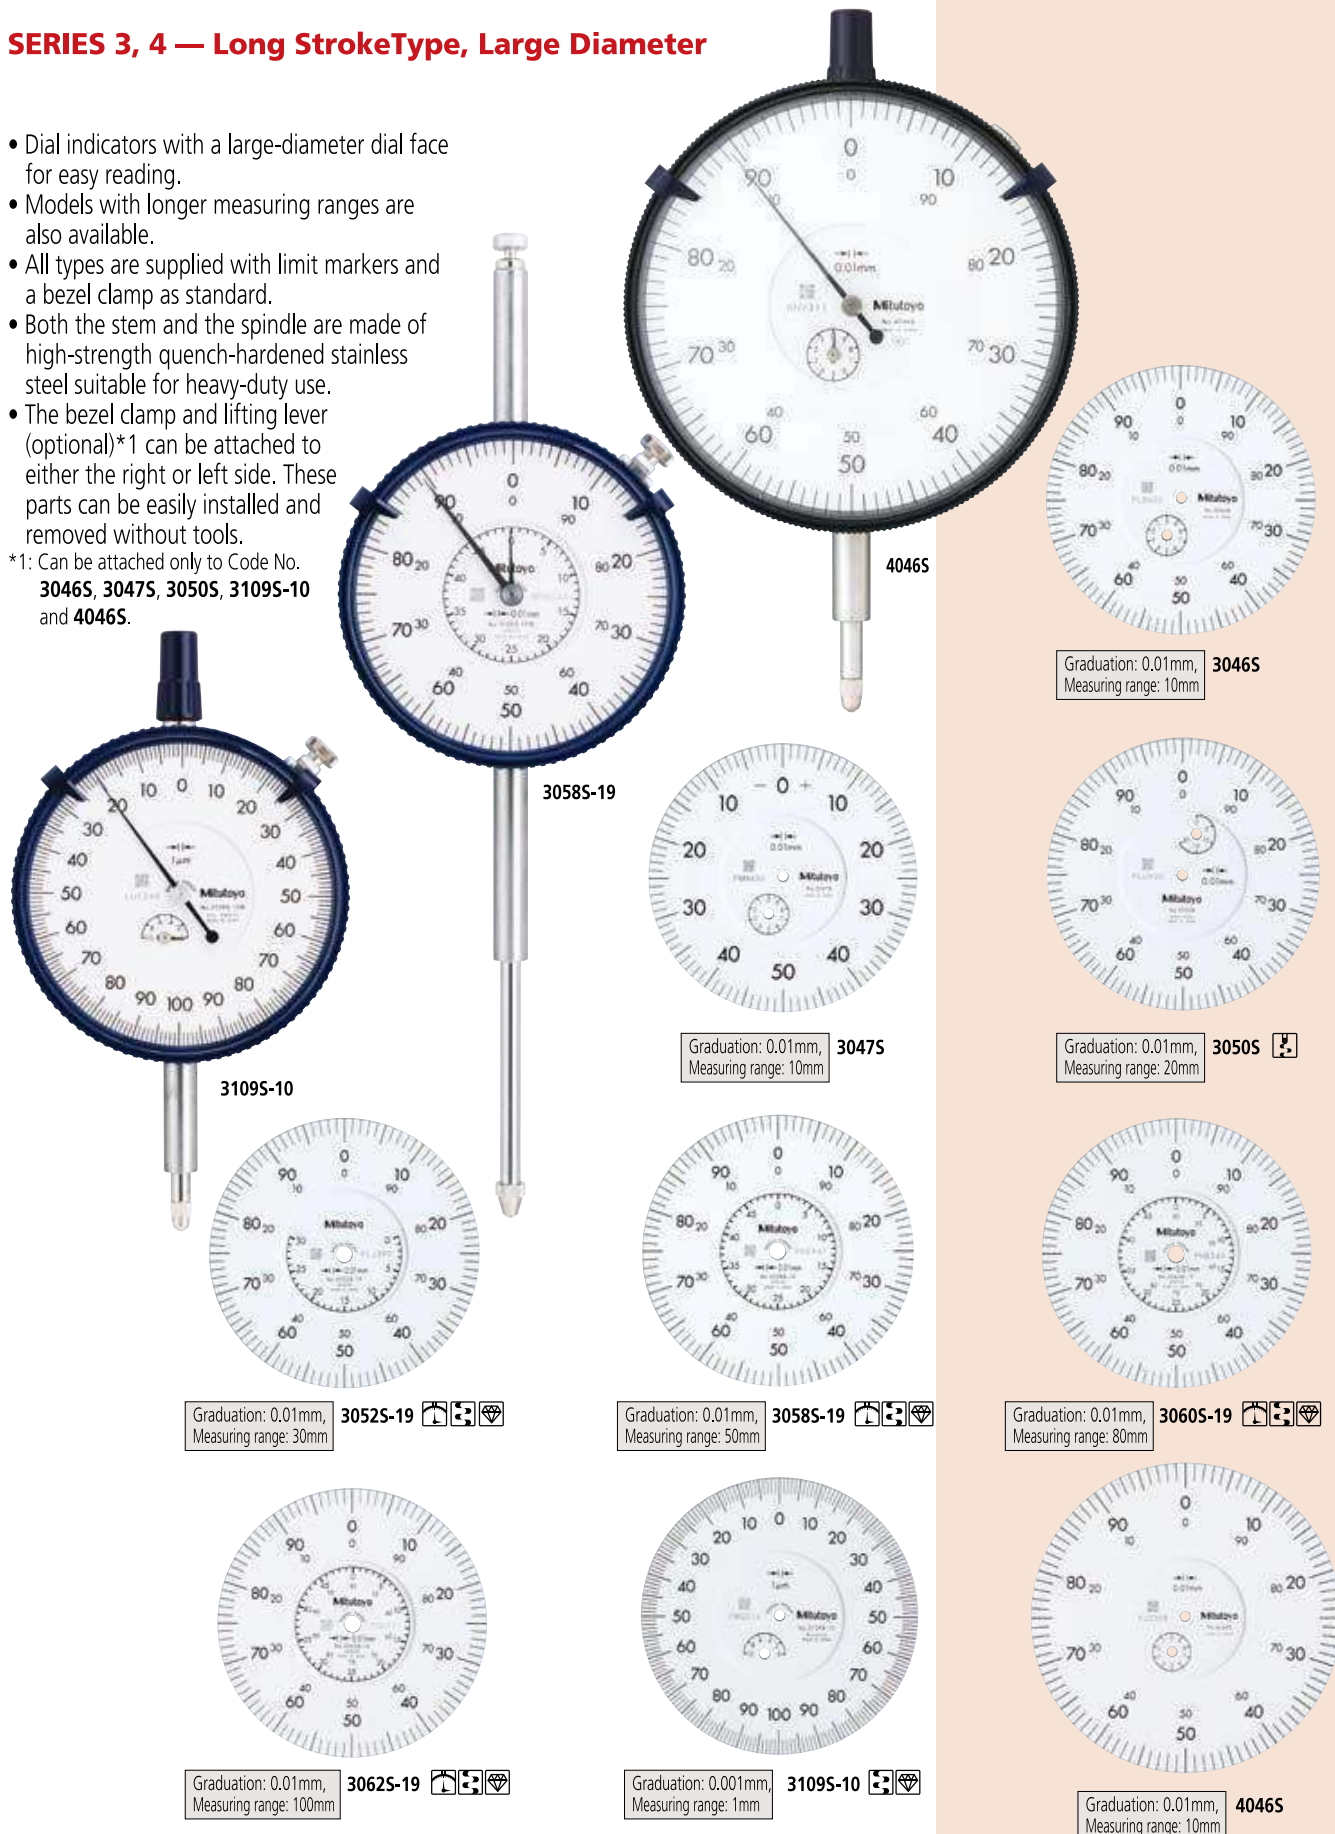

Graduation: 0.01mm, Measuring range: 10mm **3046S**

3058S-19

Graduation: 0.01mm, Measuring range: 10mm **3047S**

Graduation: 0.01mm, Measuring range: 20mm **3050S**

3109S-10

Graduation: 0.01mm, Measuring range: 30mm **3052S-19**

Graduation: 0.01mm, Measuring range: 50mm **3058S-19**

Graduation: 0.01mm, Measuring range: 80mm **3060S-19**

Graduation: 0.01mm, Measuring range: 100mm **3062S-19**

Graduation: 0.001mm, Measuring range: 1mm **3109S-10**

Graduation: 0.01mm, Measuring range: 10mm **4046S**

F

