

60 dB Gain High Power High Gain Amplifier at 10 Watt Psat Operating From 100 MHz to 6 GHz with SMA

SPA-060-60-10-SMA is a 10W high gain coaxial power amplifier operating in the 0.1 to 6 GHz frequency range. The amplifier offers 40 dBm typical of saturated power and 60 dB typical small signal gain with gain flatness of ± 1.25 dB typical. This excellent technical performance is achieved through the use of advanced GaN devices. The amplifier requires typically a +28V DC power supply. The connectorized SMA module is unconditionally stable and includes built-in voltage regulation, bias sequencing, DC On/Off TTL Logic control, current shutdown and over temp shutdown at +85°C for added reliability. The amplifier operates over the temperature range of -40°C and +85°C. The RF Input/Output Connectors are SMA Female. Along with a 15 Pin Micro-D Female Control Socket.

Electrical Specifications (TA = +25°C, DC Voltage = 28Volts , DC Current = 2,200mA)

Description	Min	Typ	Max	Unit
Frequency Range	0.1		6	GHz
Small Signal Gain	60			dB
Gain Flatness		± 1.25		dB
Input Power (CW)			+20	dBm
Input Power (Peak) 100 μ s pulse, 10% duty cycle			+23	dBm
Psat	+39	+40		dBm
Efficiency (PAE)		20		%
Harmonics @50 Watts		-15		dBc
Noise Figure			10	dB
Spurious @50 Watts		-70		dBc
Input VSWR		2:1		
Output VSWR		2:1		
TTL Control	"1": Off, "0": On (Blanking), Enable: 0V, Disable: 5V			
Operating DC Voltage		28		Volts
Operating DC Current		2,200		mA
Operating Temperature Range	-40		+85	°C

Mechanical Specifications

Size	
Length	2.5 in [63.5 mm]
Width	2.75 in [69.85 mm]
Height	0.45 in [11.43 mm]
Weight	0.276 lbs [125.19 g]
Input Connector	SMA Female
Output Connector	SMA Female
Cooling	HEATSINK REQUIRED use PE15A5990



Features:

- 0.1 GHz to 6 GHz Frequency Range
- Psat 40 dBm typ
- Small Signal Gain: 60 dB min
- Gain Flatness ± 1.25 dB typical
- 50 Ohms Input and Output Matched
- Unconditionally Stable
- Regulated Supply & Bias Sequencing
- Hermetically Sealed Module
- Over Current Shutdown
- Mismatch Handling 5.0:1 max
- Over Temp Shutdown
- Designed to meet MIL-STD-810 Conditions

Applications:

- Military Radio
- Communication Systems
- High Gain Driver Power Amplifier
- High Gain Output Power Amplifier

Fairview Microwave
 1130 Junction Dr. #100
 Allen, TX 75013
 Tel: 1-800-715-4396 / (972) 649-6678
 Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

Environmental Specifications

Temperature

Operating Range -40 to +85 deg C
 Storage Range -40 to +85 deg C


Humidity IAW MIL-STD-810F, up to 95%% Non-Condensing
 Shock IAW MIL-STD-202G method 214, condition C
 Vibration IAW MIL-STD-810F, Method 514.5, Table
 Altitude up to 30,000 ft feet Above Sea Level
 Salt Fog 5%, +35°C 96 hrs IAW MIL-STD- 810G method
 Fungus IAW MIL-STD-810G method 508.6

Compliance Certifications (see [product page](#) for current document)



Plotted and Other Data

Notes:

- Values at 25 °C, sea level
- ESD Sensitive Material, Transport material in Approved ESD bags. Handle only in approved ESD Workstation.
- Heat Sink Required for Proper Operation, Unit is cooled by conduction to heat sink.

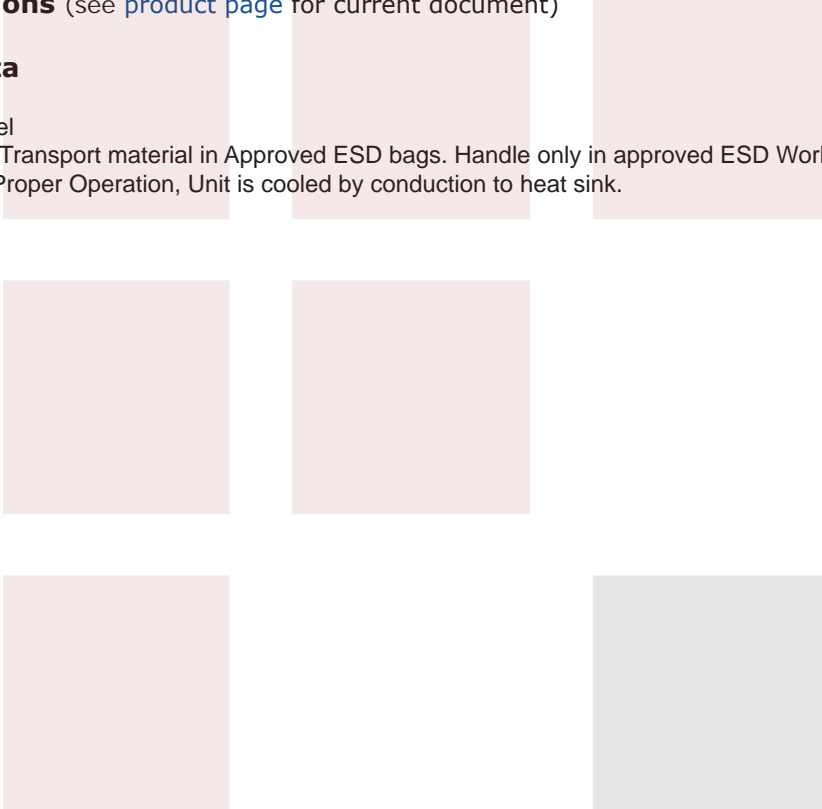

Typical Performance Data

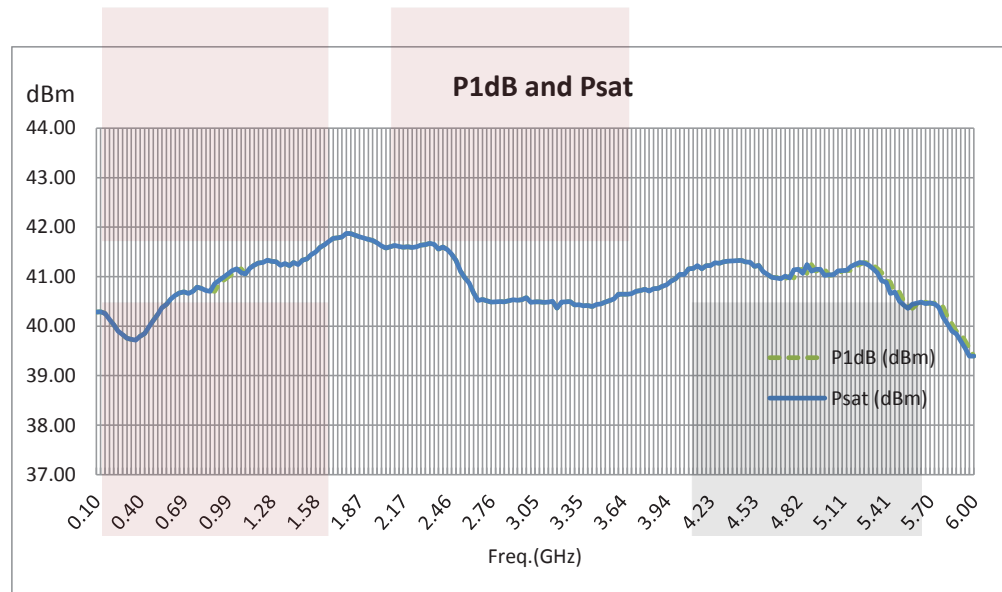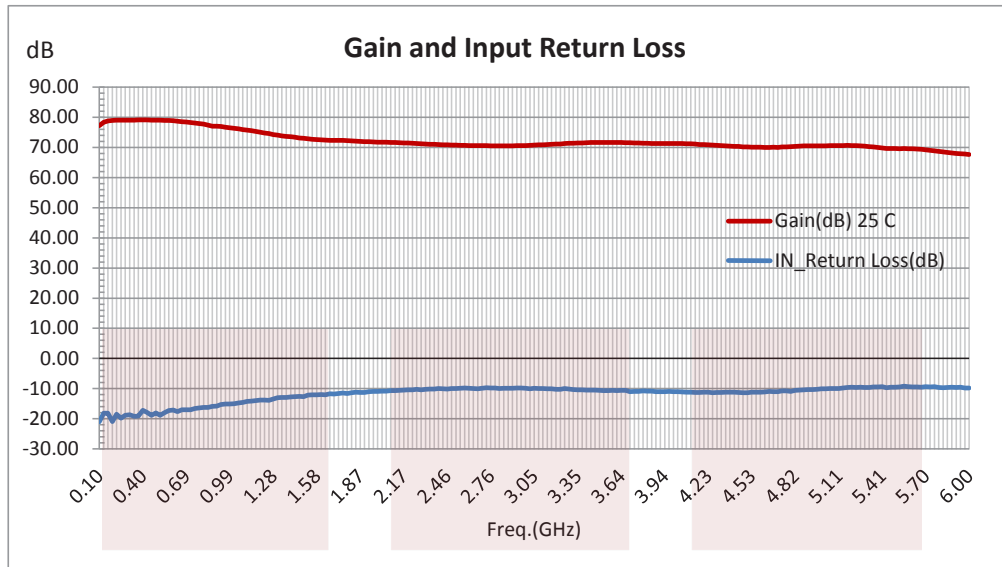


60 dB Gain High Power High Gain Amplifier at 10 Watt Psat Operating From 100 MHz to 6 GHz with SMA from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.


For additional information on this product, please click the following link: [60 dB Gain High Power High Gain Amplifier at 10 Watt Psat Operating From 100 MHz to 6 GHz with SMA SPA-060-60-10-SMA](#)

URL: <https://www.fairviewmicrowave.com/60db-high-power-high-gain-amplifier-10watt-spa-060-60-10-sma-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

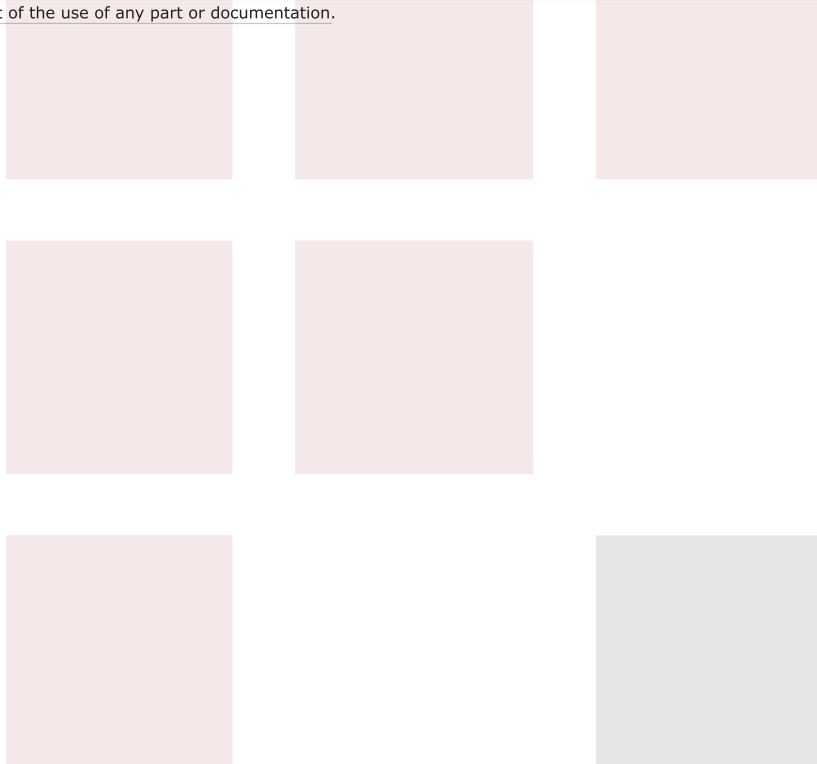

PIN	DESC.	PIN	DESC.	PIN	DESC.
1	+28V	6	N/C	11	GND
2	+28V	7	OVER-CURRENT BIT	12	GND
3	GND	8	BLANKING TTL	13	N/C
4	GND	9	+28V	14	N/C
5	N/C	10	+28V	15	OVER-TEMP BIT

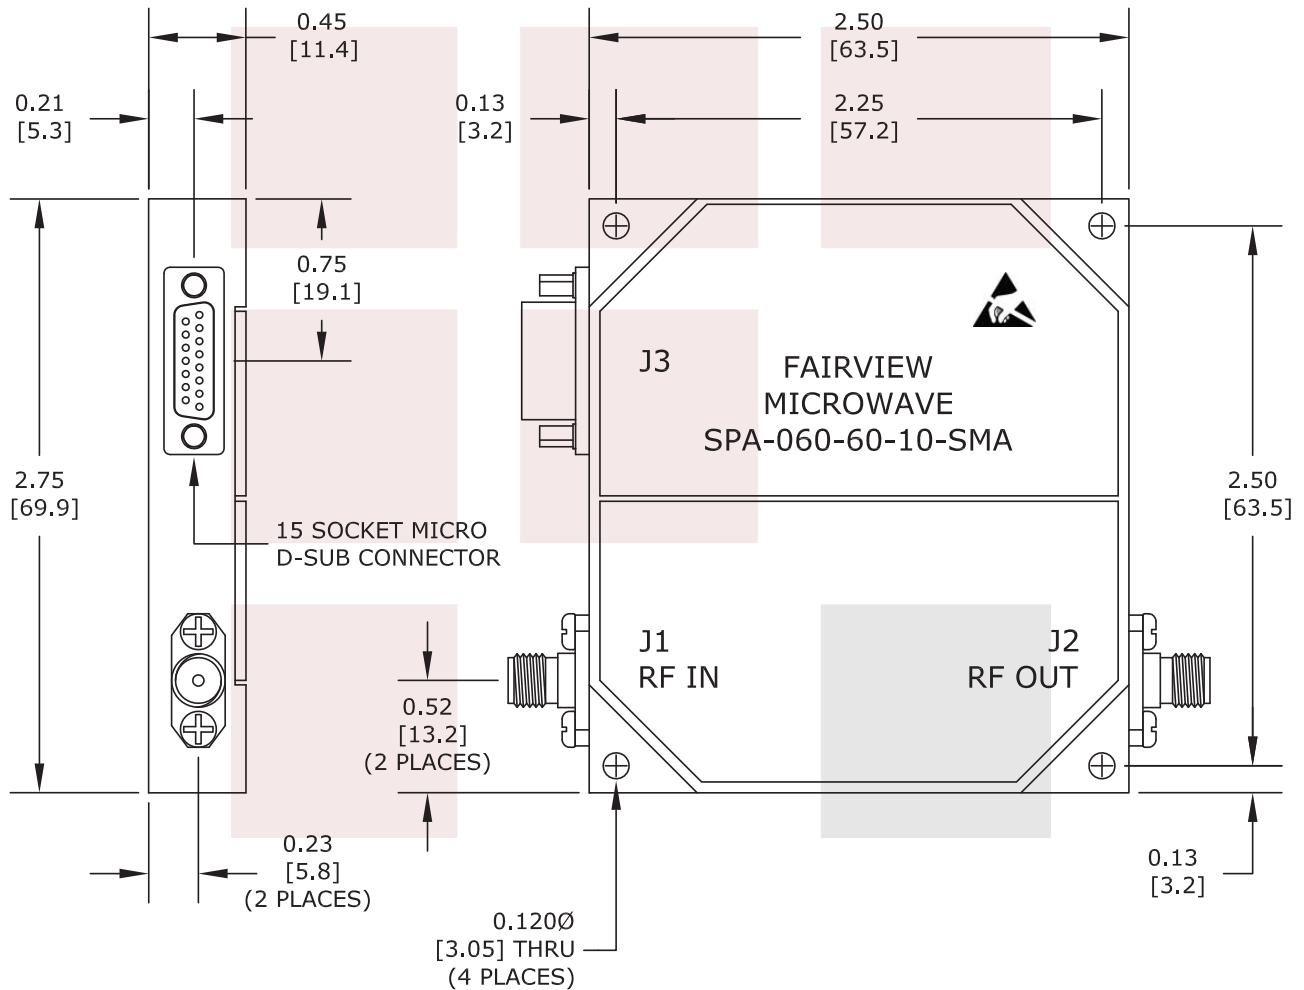

NOTE:
HEAT SINK REQUIRED FOR PROPER OPERATION,
UNIT IS COOLED BY CONDUCTING TO HEAT SINK.

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM		NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].			
TITLE 60 dB Gain High Power High Gain Amplifier at 10 Watt Psat Operating From 100 MHz to 6 GHz with SMA		DWG NO SPA-060-60-10-SMA		CAGE CODE 3FKR5	
CAD FILE 080614		SHEET		SCALE N/A	
		SIZE A		150	