

SM3946 DATA SHEET

2.4mm Male to 1.85mm Female Adapter

2.4mm male to 1.85mm female adapter part number SM3946 from Fairview Microwave is in-stock and ships same day. This Fairview 2.4mm to 1.85mm adapter has a male to female gender configuration. SM3946 2.4mm male to 1.85mm female adapter operates to 50 GHz. The 2.4mm connector mates mechanically with commercially available 1.85mm (V) connectors. The Fairview Microwave RF adapter provides good VSWR of 1.3:1 maximum.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications

Description	Min	Тур	Max	Units
Frequency Range	DC		50	GHz
VSWR			1.3:1	

Electrical Specification Notes: Values at 25°C, sea level.

Mechanical Specifications

Size

 Length
 0.773 in [19.63 mm]

 Weight
 0.0097 lbs [4.4 g]

Description	Connector 1	Connector 2
Туре	2.4mm Male	1.85mm Female
Polarity	Standard	Standard
Mating Cycles	500	500
Mating Torque	8 to 10 in-lbs	
	[0.90 to 1.13 Nm]	



Configuration:

- 2.4mm Male Connector 1
- 1.85mm Female Connector 2
- 50 Ohms
- Straight Body Geometry

Features:

- VSWR of 1.3:1 max up to 50 GHz
- Contact plating according to MIL-G-45204
- Gold over Nickel Plated Beryllium Copper Contact

Applications:

- Enables Between Series Connections
- General Purpose Test

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013

Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689





Material Specifications

Description	Connector 1	Connector 2				
Туре	2.4mm Male	1.85mm Female				
Contact Material	Beryllium Copper	Beryllium Copper				
Contact Plating	Gold over Nickel	Gold over Nickel				
Contact Plating Spec.	MIL-G-45204	MIL-G-45204				
Insulation Material	Oxide-Noryl	Oxide-Noryl				
Outer Contact Material		Passivated Stainless Stee				
Outer Conductor Contact Spe	C.	ASTM A380				
Body Material	Passivated Stainless Steel					
Body Plating Spec.	ASTM A380					
Coupling Nut Material	Passivated Stainless Steel					
Coupling Nut Plating Spec.	ASTM A380					

Environmental Specifications

Temperature


Operating Range Vibration Salt Spray -55 to +100 deg C MIL-STD 202, Method 204, Condition D (20 G's) MIL-STD 202, Method 101, Condition B, 5% salt solution

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Typical Performance Data

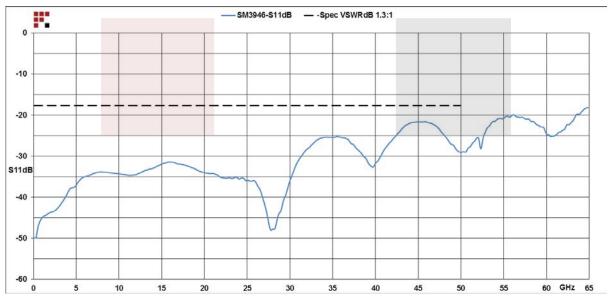





2.4mm Male to 1.85mm Female Adapter from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: 2.4mm Male to 1.85mm Female Adapter SM3946


The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order

URL: https://www.fairviewmicrowave.com/2.4mm-male-1.85mm-female-adapter-sm3946-p.aspx

stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.	to implem	nent improv	ements.	Fairview	Microwa	ave reserve	es the righ	nt to mal	ke such	change	es as re	quired.	Unless	otherwise
	stated, al	I specificati	ions are	nominal.	Fairvie	w Microwa	ve does n	ot make	any re	presen	tation o	r warra	inty rega	arding the
arising out of the use of any part or documentation.	suitability	of the par	t describ	ed hereir	n for any	particular	purpose,	and Fai	rview M	1icrowa	ve does	not as	sume ai	ny liability
	arising ou	it of the use	e of any	part or do	ocument	ation.								





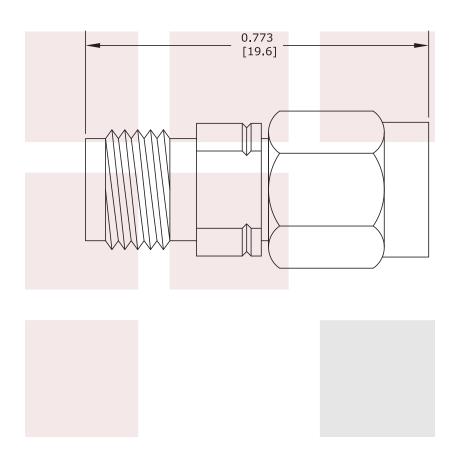

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].					
2.4mm Male to 1.85mm Female Adapter	DWG NO SM3946			CAGE CODE 3FKR5		
	CAD FILE 120915	SHEET	SCALE	N/A	SIZE A	150