

**SMA Dual Directional Coupler 50 dB Coupled Port  
From 20 MHz to 1,000 MHz Rated To 200 Watts**

**Electrical Specifications**

Description	Min	Typ	Max	Units
Frequency Range	20		1,000	MHz
Directivity	20			dB
Impedance		50		Ohms
Insertion Loss			0.35	dB
Input Power			200	Watts
Input VSWR			1.25:1	
Coupling Accuracy			50	dB
Coupling Tolerance			± 1.5	dB
Coupling Flatness			± 0.6	dB



**Features:**

- Connector 1: SMA Female
- Connector 2: SMA Female
- Coupled Connectors: SMA Female
- Design: Dual Directional Coupler

**Mechanical Specifications**

**Temperature**

Operating Range +85 to -55 deg C

**Size**

Length 2.5 in [63.5 mm]  
Width/Dia. 1.11 in [28.19 mm]  
Height 1.3 in [33.02 mm]

Housing Material and Plating Aluminum Alloy, Chem Film

**Connector 1**

Type SMA Female

**Connector 2**

Type SMA Female

**Connector 3**

Type SMA Female

**Connector 4**

Type SMA Female

**Compliance Certifications** (visit [www.FairviewMicrowave.com](http://www.FairviewMicrowave.com) for current document)

RoHS Compliant Yes

Fairview Microwave  
1130 Junction Dr. #100  
Allen, TX 75013  
Tel: 1-800-715-4396 / (972) 649-6678  
Fax: (972) 649-6689  
[www.fairviewmicrowave.com](http://www.fairviewmicrowave.com)  
[sales@fairviewmicrowave.com](mailto:sales@fairviewmicrowave.com)

**Plotted and Other Data**



Notes:

SMA Dual Directional Coupler 50 dB Coupled Port From 20 MHz to 1,000 MHz Rated To 200 Watts from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [SMA Dual Directional Coupler 50 dB Coupled Port From 20 MHz to 1,000 MHz Rated To 200 Watts FMCP1004](#)

URL: <http://www.fairviewmicrowave.com/sma-dual-directional-coupler-50-db-1000-mhz-200-watts-fmcp1004-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

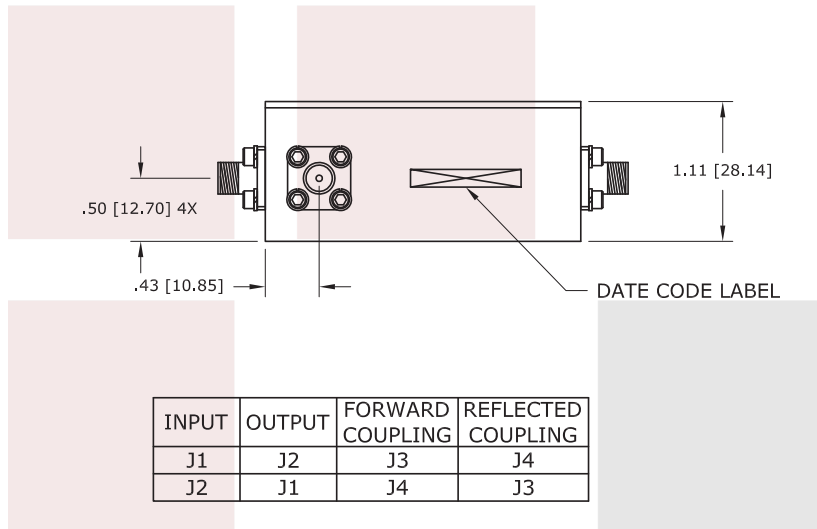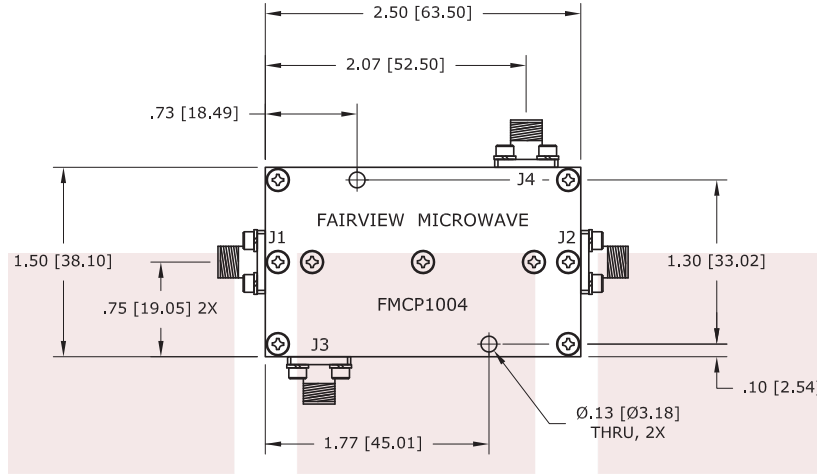

INPUT	OUTPUT	FORWARD COUPLING	REFLECTED COUPLING
J1	J2	J3	J4
J2	J1	J4	J3

TOLERANCE	.XX ±.02 .XXX ±.005 ANG. ±1/2°
-----------	--------------------------------------

\* THESE DIMENSIONS AND TOLERANCES  
 SUPERSEDE NOTE #1 ON TITLE BLOCK.

<b>FAIRVIEW MICROWAVE INC.</b> ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM		NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].			
TITLE SMA Dual Directional Coupler 50 dB Coupled Port From 20 MHz to 1,000 MHz Rated To 200 Watts		DWG NO FMCP1004		CAGE CODE 3FKR5	
CAD FILE	041015	SHEET	SCALE	N/A	SIZE A 2233